

15CXA400Nd

COAXIAL TRANSDUCER

KEY FEATURES

- Program power: 800 / 180 W_{AES} (LF / HF)
- Sensitivity: 98 / 105 dB (1W / 1m) (LF / HF)
- 4" voice coil woofer
- 2.85" voice coil compression driver
- Common neodymium magnet system design

- Demodulating rings in both LF and HF units
- Composite titanium / polyester diaphragm
- Weatherproof LF cone
- 60° coverage horn for HF dispersion control





TECHNICAL SPECIFICATIONS

Nominal diameter	380 mm		15 in
Rated impedance (LF/HF)			8 / 16 Ω
Minimum impedance (LF/HF)		6,	6 / 10,9 Ω
Power capacity 1 (LF/HF)		400 /	90 W _{AES}
Program power ² (LF/HF)		80	0 / 180 W
Sensitivity (LF/HF ³)	98 dB	1W /	1m @ Z _N
	105 dB	1W /	1m @ Z _N
Frequency range		40 - 2	20.000 Hz
Recom. HF crossover			or higher of min slope)
Voice coil diameter (LF/HF)	101,6	mm 3	4 in
	72,4	ł mm	2,85 in
BI factor			19 N/A
Moving mass			0,084 kg
Voice coil length			16 mm
Air gap height			10 mm
X _{damage} (peak to peak)			28 mm

THIELE-SMALL PARAMETERS 4

Resonant frequency, f _s	40 Hz
D.C. Voice coil resistance, R _e	6,6 Ω
Mechanical Quality Factor, Q _{ms}	4,4
Electrical Quality Factor, Q _{es}	0,39
Total Quality Factor, Qts	0,36
Equivalent Air Volume to C _{ms} , V _{as}	196 I
Mechanical Compliance, C _{ms}	181 μm / N
Mechanical Resistance, R _{ms}	4,9 kg / s
Efficiency, η ₀	3,3 %
Effective Surface Area, S _d	0,088 m ²
Maximum Displacement, X _{max} ⁵	6 mm
Displacement Volume, V _d	350 cm ³
Voice Coil Inductance, L _e	1 mH

Notes

¹ The power capaticty is determined according to AES2-1984 (r2003) standard.

² Program power is defined as power capacity + 3 dB.

³ Sensitivity was measured at 1m distance, on axis, with 1W input, averaged in the range 1 - 7 kHz


⁴ T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

 $^{^{\}rm s}$ The X_{max} is calculated as (L_{vc} - H_{ag})/2 + (H_{ag}/3,5), where L_{vc} is the voice coil length and H_{ag} is the air gap height.




15CXA400Nd

COAXIAL TRANSDUCER

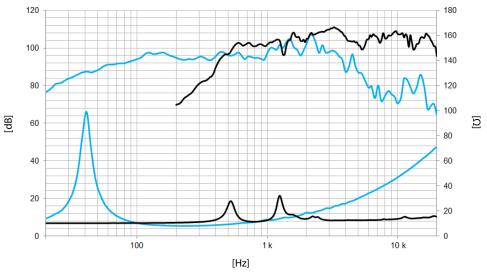


Note: Frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

FILTERED FREQUENCY RESPONSE

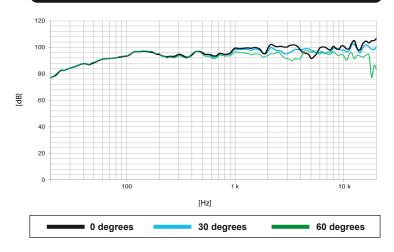

Note: Filtered frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m using filter FD-2XA

POLAR PATTERN

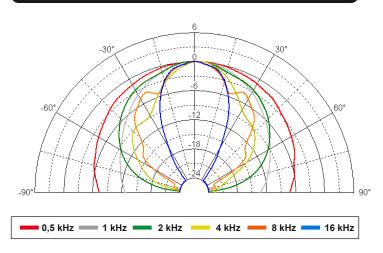

MOUNTING INFORMATION

Overall diameter	388 mm	15,3 in
Bolt circle diameter	370 mm	14,6 in
Baffle cutout diameter:		
- Front mount	352 mm	13,8 in
Depth	182 mm	7,2 in
	7 I	0,25 ft ³
Net weight	7,2 kg	15,9 lb
Shipping weight	8,1 kg	17,9 lb

DIMENSION DRAWING

