

8CX300Fe

COAXIAL TRANSDUCER

KEY FEATURES

- High power handling: 600 W / 100 W program power
- 2,5" / 1,75" voice coil (LF/HF)
- High sensitivity: 95 / 105 dB (1W / 1m) (LF/HF)
- FEA optimized common magnet circuit

- Shorting cap for extended response
- Weatherproof cone with treatment for both sides of the cone
- PM4 diaphragm for natural sound
- 70° conical coverage horn





TECHNICAL SPECIFICATIONS

Nominal diameter	200 mm		8 in
Rated impedance (LF/HF)			8 / 16 Ω
Minimum impedance (LF/HF)		6,6	δ / 10,1 Ω
Power capacity 1 (LF/HF)		300 /	50 W _{AES}
Program power ² (LF/HF)		600	0 / 100 W
Sensitivity (LF/HF ³)	95 dB	1W /	1m @ Z _N
	105 dB	1W /	1m @ Z _N
Frequency range		90 - 2	0.000 Hz
Recom. HF crossover	2 kHz or higher		
	(12 dB/oc	t min slope)
Voice coil diameter (LF/HF)	63,5 mm		2,5 in
	44,4 r	nm	1,75 in
BI factor			9,6 N/A
Moving mass			0,020 kg
Voice coil length			15 mm
Air gap height			7 mm

THIELE-SMALL PARAMETERS4

Resonant frequency, f _s	89 Hz
D.C. Voice coil resistance, R _e	5,2 Ω
Mechanical Quality Factor, Q _{ms}	4,2
Electrical Quality Factor, Q _{es}	0,63
Total Quality Factor, Q _{ts}	0,55
Equivalent Air Volume to C _{ms} , V _{as}	10,8 I
Mechanical Compliance, C _{ms}	158 μm / N
Mechanical Resistance, R _{ms}	2,7 kg/s
Efficiency, η ₀	1,2 %
Effective Surface Area, S _d	0,022 m ²
Maximum Displacement, X _{max} ⁵	6 mm
Displacement Volume, V _d	132 cm ³
Voice Coil Inductance, L _e @ 1 kHz	0,2 mH

Notes:

¹ The power capaticty is determined according to AES2-1984 (r2003) standard.

² Program power is defined as power capacity + 3 dB.

³ Sensitivity was measured at 1m distance, on axis, with 1W input, averaged in the range 2 - 10 kHz


⁴ T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

 $^{^{\}rm s}$ The ${\rm X}_{\rm max}$ is calculated as $({\rm L}_{\rm vc}$ - ${\rm H}_{\rm ag}$ /2 + $({\rm H}_{\rm ag}$ /3,5), where ${\rm L}_{\rm vc}$ is the voice coil length and ${\rm H}_{\rm ag}$ is the air gap height.




8CX300Fe

COAXIAL TRANSDUCER

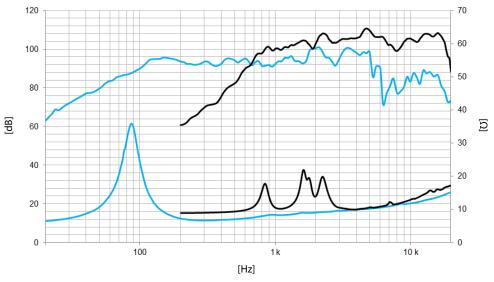

Note: Frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

FILTERED FREQUENCY RESPONSE

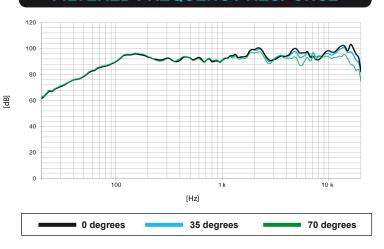

Note: Filtered frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m using filter FD-2CX

90 1,5 kHz 1 kHz 2 kHz 4 kHz 8 kHz 16 kHz

MOUNTING INFORMATION

Overall diameter	212 mm	8,3 in
Bolt circle diameter	198 mm	7,8 in
Baffle cutout diameter:		
- Front mount	180 mm	7,1 in
Depth	126 mm	4,9 in
Net weight	4,6 kg	10,1 lb
Shipping weight	4,9 kg	10,8 lb

DIMENSION DRAWING

